

The T-80J Jeep is designed to be used with our detachable gooseneck trailer, but also with other brands of lowboys on the market. It features a sliding adjustable fifth wheel hitch, air-ride suspension, telescoping pin-type parking stands, and automatic slack adjusters. We offer many options to customize the Jeep to fit your needs. Built by Towmaster[®], you're sure to get the quality you expect.



41" sliding adjustable fifth wheel.



Heavy-duty main frame with conveniently located air and electrical connectors.



Air ride suspension.

Quick Specs:

- 41" sliding fifth-wheel
- Telescoping parking stands (pin)
- T1 steel flange beams
- 8'-0" width
- Air brakes
- Ridewell[®] air suspension
- Park brake on all axles
- Auto slack adjusters
- LED lights



Photos may show optional equipment.

AMERICA'S BEST BUILT TRAILERS FOR PROFESSIONAL HAULERS




800-462-4517
TOWMASTER.COM



**GALVANIZING
AVAILABLE**



MORE MODELS • MORE OPTIONS • MORE CHOICES
DROP-DECK • TILT BED • DECK-OVER • GOOSENECK • LOWBOY • HYDRAULIC TAIL

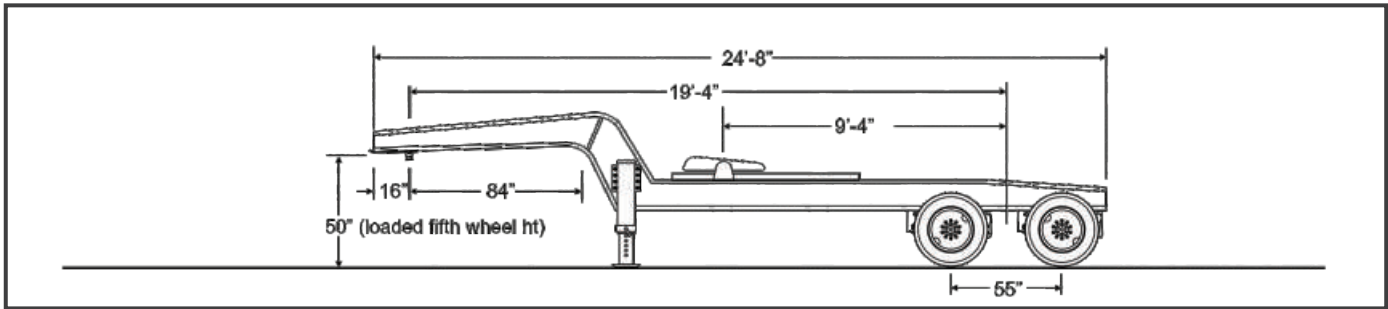

CAPACITY / DIMENSIONS		T-80J		
Capacity Rating (lbs/kg)	80,000 / 36,287			
Approx. Weight (lbs/kg)	7,500 / 3,402			
GVWR (lbs/kg)	95,000 / 43,091			
GAWR (lbs/kg)	50,000 / 22,680			
Fifth Wheel Height (fully loaded)(in/mm)	50 / 1270			
Hitch to Axle Spread Length (ft-in/mm)	19-4 / 5893			
Max Fifth Wheel to Axle Spread (ft-in/mm)	9-4 / 2845			
Overall Width (ft-in/mm)	8-0 / 2438			
Overall Length (ft-in/mm)	24-8 / 7518			
FRAME				
Swing Clearance (in/mm)	84 / 2134			
King Pin Setting (in/mm)	16 / 406			
Main Beam (T1 Flange) (in)	15 Fabricated			
Fifth-Wheel Slide (in/mm)	41 / 1041			
No. of Parking Jacks (capacity)	2 / 25K			
Parking Jack Type	Telescoping Pin-Type			
SUSPENSION / TIRES				
Air Suspension	S			
Axles (number of axles)	2			
Axle Spread (in/mm)	55 / 1397			
Axle Capacity (each) (lbs/kg)	25,000 / 11,340			
Forged Alloy Spindles	S			
Oil Bath Hubs	S			
Air Brakes	S			
Brake Size (in/mm)	16.5x7 / 419x178			
22.5x8.25 Wheels	S			
Wheels Hub Piloted	S			
Wheel Bolt Pattern	10-bolt			
Tire Size (all Load Range Rating H)	255/70R x 22.5			
Poly Mud Flaps	S			

STANDARD EQUIPMENT

- S.A.E. king pin set at 16"
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- Trailer color: Equipment black

OPTIONAL EQUIPMENT

- Longer swing-clearance lengths
- Gooseneck fenders
- Aluminum toolbox
- Chain/storage tray in gooseneck
- Lockable lid for storage tray
- 8'-6" and 9'-0" width options
- Flag holders
- Raise/lower kit
- Manual ride height control valve
- Aluminum wheels
- Tire equalization options
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal



Other options may be available. Ask your dealer or visit our website.

*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.
Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

MONROE TOWMASTER, LLC., LITCHFIELD, MINNESOTA, USA.

towmaster.com
800-462-4517
©Monroe Towmaster, LLC - 0218